



Hott T725-8G Battery Replacement

Use this guide to replace the battery in your Hott T725-8G. You will need this [<https://www.ifixit.com/Guide/Hott+T725-8G+Back+Panel+Replacement/74840>] Prerequisite Guide] before you begin.

Written By: Emma Carroll



INTRODUCTION

This guide will walk you through replacing the battery in your Hott T725-8G.



TOOLS:

- [iFixit Opening Tools](#) (1)
- [Heavy-Duty Spudger](#) (1)



PARTS:

- [Universal Android Replacement Battery](#) (1)

Step 1 — Battery




- Remove the yellow tape holding the wire connecting the battery to the motherboard with your fingers.

Step 2




- Use your fingers to separate the ribbon wire from the battery and the back of the display.

Step 3

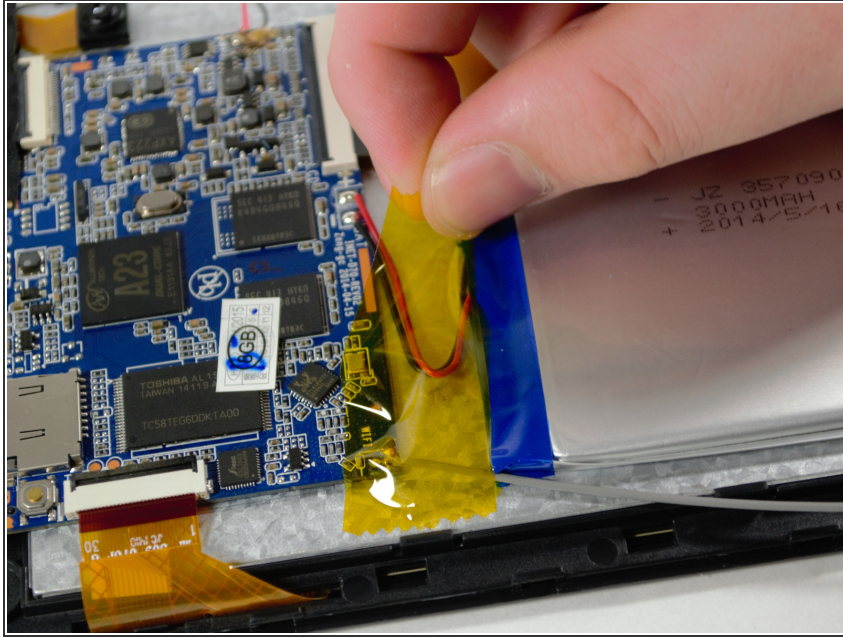

- Use your fingers to remove more yellow tape holding down the wire connecting the battery to the motherboard.

Step 4

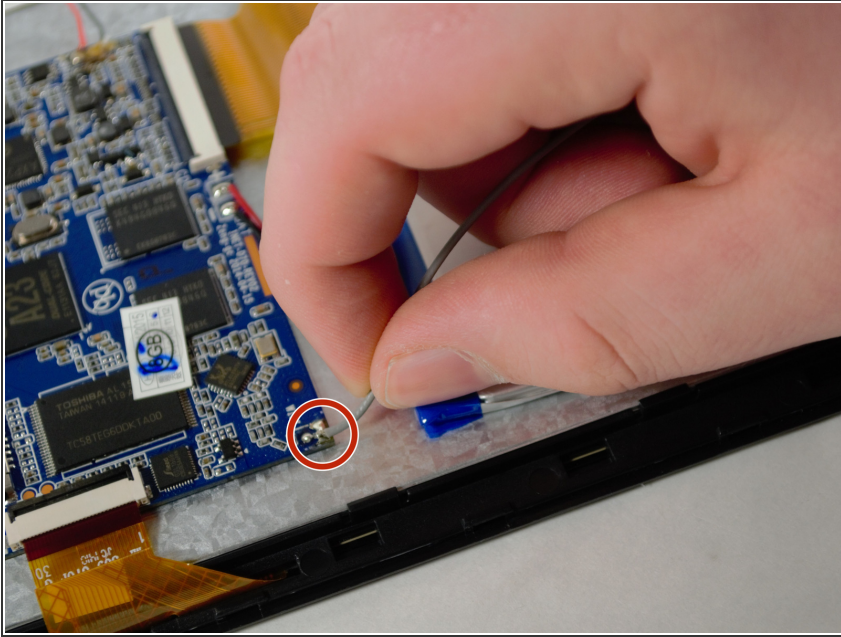


- You can check one of the connection points between the battery and the motherboard to see if it is firmly connected (which it should be) using the plastic Spudger. It is not necessary to remove this wire to replace the battery.

Step 5



- Use a **Plastic Spudger** to separate the adhesive side of the battery from the back of the display.
- ⚠ Avoid using metal when working with batteries.
- The adhesive is extremely sticky, but will separate. Ensure that the battery doesn't bend or fold while removing it.

Step 6

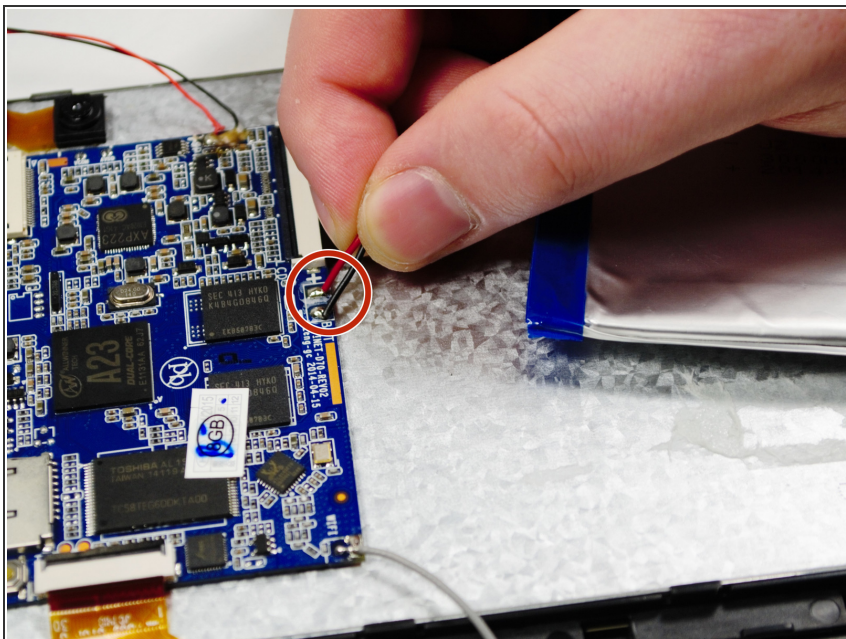

- You may use the plastic Spudger to separate the connections between the battery and motherboard. The new battery is now ready to be soldered on.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 07:01:12 AM.